



LG VX4400 Screen Replacement

Written By: Nico Chiarito



INTRODUCTION

This guide will show you how to replace the screen.



TOOLS:

- [Phillips #00 Screwdriver](#) (1)
 - [Spudger](#) (1)
-

Step 1 — Screen




- Remove the four rubber stoppers around the main screen using a pointed-end spudger

Step 2




- Use a number #00 Philips screwdriver to unscrew the four screws under the rubber stoppers

Step 3

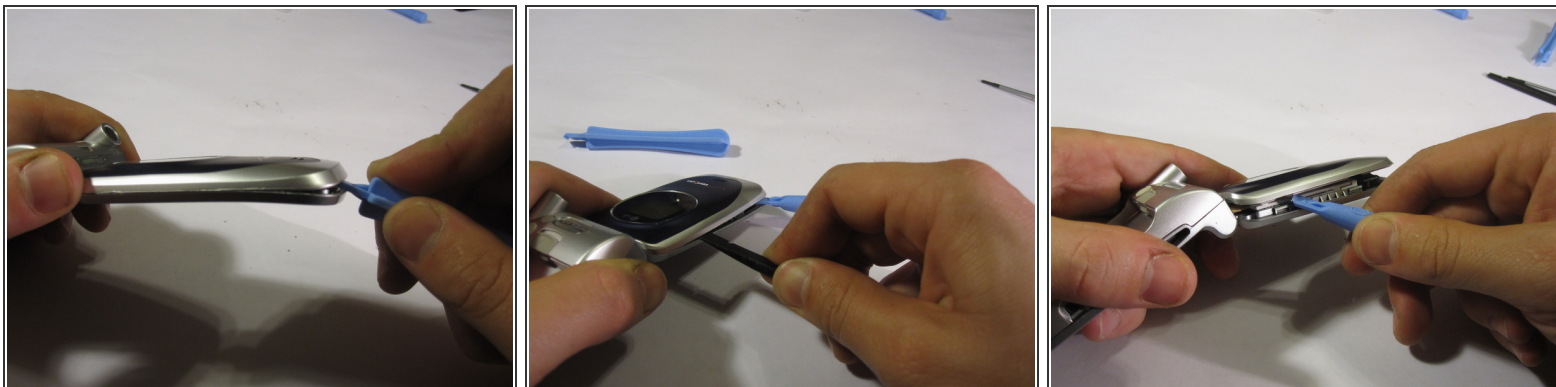



- Use a plastic opening tool, pry the top end open
- Whilst prying the top panel with one plastic opening tool, use a thinner iPod opening tool to slide down the gap and pry open the case
- Free the opposite side in the same manner

Step 4

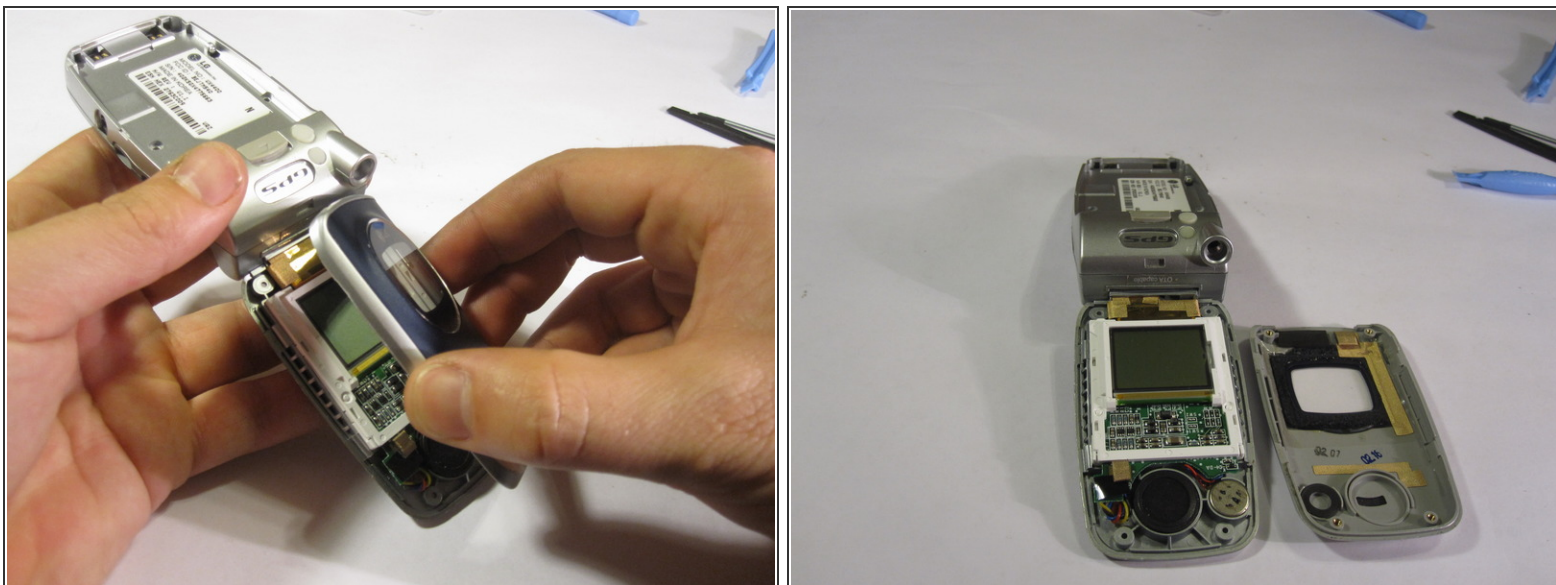

- Remove plastic screen panel to reveal internal components

Step 5

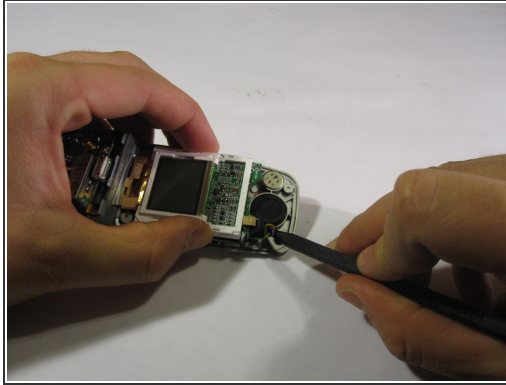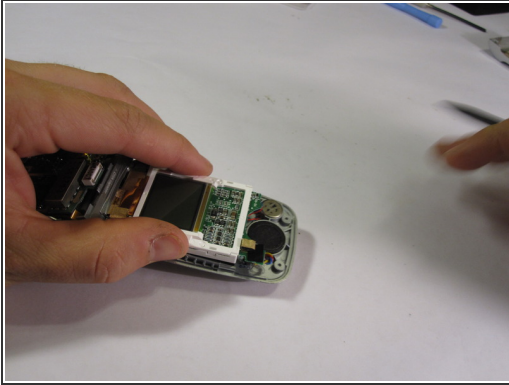

- Remove the screen board by lifting away from the phone
- Remove speaker by prying with a spudger

Step 6



- Once screen board is pulled away, gently press out the plastic screen

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-25 11:15:01 PM.